



Infor LN Analytics Program Cost Ledger Installation and Configuration Guide

10.5.1

Copyright © 2017 Infor

Important Notices

The material contained in this publication (including any supplementary information) constitutes and contains confidential and proprietary information of Infor.

By gaining access to the attached, you acknowledge and agree that the material (including any modification, translation or adaptation of the material) and all copyright, trade secrets and all other right, title and interest therein, are the sole property of Infor and that you shall not gain right, title or interest in the material (including any modification, translation or adaptation of the material) by virtue of your review thereof other than the non-exclusive right to use the material solely in connection with and the furtherance of your license and use of software made available to your company from Infor pursuant to a separate agreement, the terms of which separate agreement shall govern your use of this material and all supplemental related materials ("Purpose").

In addition, by accessing the enclosed material, you acknowledge and agree that you are required to maintain such material in strict confidence and that your use of such material is limited to the Purpose described above. Although Infor has taken due care to ensure that the material included in this publication is accurate and complete, Infor cannot warrant that the information contained in this publication is complete, does not contain typographical or other errors, or will meet your specific requirements. As such, Infor does not assume and hereby disclaims all liability, consequential or otherwise, for any loss or damage to any person or entity which is caused by or relates to errors or omissions in this publication (including any supplementary information), whether such errors or omissions result from negligence, accident or any other cause.

Without limitation, U.S. export control laws and other applicable export and import laws govern your use of this material and you will neither export or re-export, directly or indirectly, this material nor any related materials or supplemental information in violation of such laws, or use such materials for any purpose prohibited by such laws.

Trademark Acknowledgements

The word and design marks set forth herein are trademarks and/or registered trademarks of Infor and/or related affiliates and subsidiaries. All rights reserved. All other company, product, trade or service names referenced may be registered trademarks or trademarks of their respective owners.

Contents

About this guide.....	5
Intended audience.....	5
Organization.....	5
Contacting Infor.....	5
Chapter 1: About Infor LN Analytics Program Cost Ledger.....	7
Architecture.....	7
Chapter 2: Installation.....	9
Installation overview.....	10
Backup Base Data Store.....	10
Installing a new version.....	10
Update of an existing version.....	11
Installer Component.....	11
Installing Repository Database and OLAP Database.....	11
Copying Analytic Modeling files.....	12
Copying Online Help files.....	13
Copying Dashboard files.....	13
Configuring Application Studio Web.....	14
Configuring Dashboards Web and Content Connection.....	14
Chapter 3: Post-installation: Filling the OLAP database.....	17
Creating and Configuring the OLAP LoadFromSource Database.....	17
Creating the OLAP LoadFromSource database.....	17
Configuring the OLAP LoadFromSource database in BI OLAP.....	18
Configuring Analytic Modeling in Business Vault.....	19
Importing and Setting up Models.....	19
Setting up a Target.....	22
Configuring Publications.....	23
Executing the publications.....	24
Chapter 4: Post-installation tasks for Reports and Dashboards.....	25
Configuration in Application Studio.....	25
Configuring Repository Administration with IFS.....	26
Configuring Dashboard Plug-in in Infor Ming.le.....	26
Configuring Online help files.....	26
Importing Dashboards.....	26

Contents

Adopting Infor Business Intelligence Self Service.....	27
Importing LN Analytics Administration Reports.....	27
Chapter 5: Removing Components of Older Releases.....	29

About this guide

The objective of this guide is to provide information about the installation and configuration of Infor LN Analytics Program Cost Ledger.

Intended audience

This guide is intended for use by administrators, responsible for installing and configuring the Infor LN Analytics Program Cost Ledger.

Organization

This table lists the chapters of this guide:

Chapter	Description
About Infor LN Analytics Program Cost Ledger	Provides a brief explanation of the Infor LN Analytics Program Cost Ledger.
Installation	Describes the process to install and configure Infor LN Analytics Program Cost Ledger.
Post installation tasks	Describes the Business Vault related task that must be performed after installing Infor LN Analytics Program Cost Ledger.
Post installation tasks for Reports and Dashboards	Describes the post installation tasks that must be performed for Infor LN Analytics Program Cost Ledger and Business Vault.

Contacting Infor

If you have questions about Infor products, go to the Infor Xtreme Support portal.

About this guide

If we update this document after the product release, we will post the new version on this website. We recommend that you check this website periodically for updated documentation.

If you have comments about Infor documentation, contact documentation@infor.com.

About Infor LN Analytics Program Cost Ledger

1

In Project and Contract Management, business intelligence (BI) refers to the software-based techniques used to identify, extract and analyze project\contract data such as budget or sales revenue by costs and income. Infor BI reporting technology provides historical, current, and predictive views of the project\contract transactions, there by facilitating better decision making. The common functions of Infor BI reporting technology are analytics, project performance management, forecast analytics, project scheduling, and so on. Infor Program Cost Ledger is a reporting solution built using the Infor BI tools.

Before the installation, you must familiarize yourself with the content of:


- Infor Connect documentation
- Infor Business Vault documentation
- Infor LN Integration Guide for Infor ION Business Vault
- Infor BI Installation Guide
- Infor BI Hardware Recommendations Guide
- Infor BI Platform Support.

You can find these documents in the Documentation section of the Infor Xtreme Support portal at <http://www.infor.com/inforxtreme>.

Use this guide as a reference at your site. This guide explains the process to use the Infor DVD Browser and administrative and user functions to complete specific setup and maintenance tasks.

Architecture

Infor LN Analytics offers an optimal solution to implement an advanced business intelligence environment for the ERP system. The solution includes the common metrics that are required by the users for Project\Contract analysis and reporting. This helps the users to accomplish the daily tasks effectively.

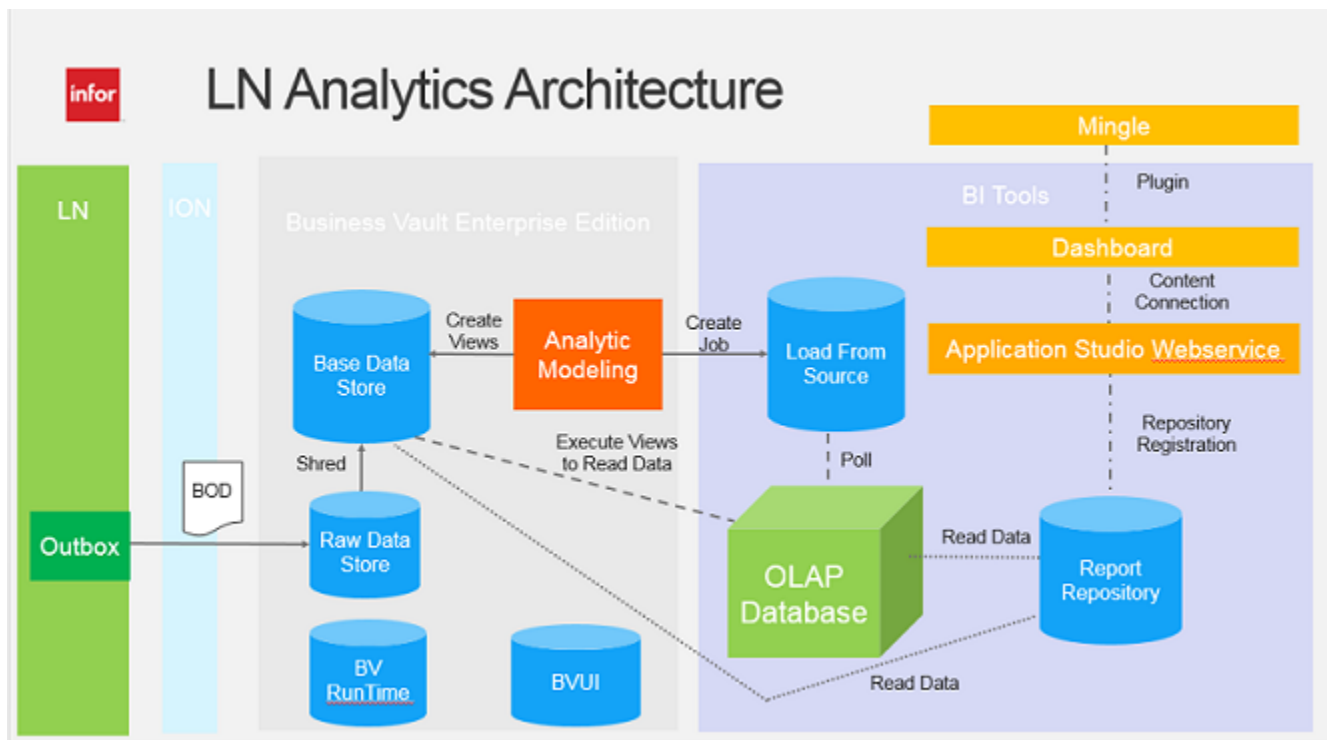

Using the LN Analytics solution, you can extract, transform, and load the data from an LN system to a BI environment. By default, the Infor suite manages the communication between modules and the storage data in the Business Vault.

The Business Vault is the central staging area. The ERP system can be connected to the vault using the standard ION connectors, custom-built ION connectors, or point-to-point integrations. When an ION connector is used, information corresponding to each transaction, posted in ERP, is converted to a standardized XML file, called a BOD (Business Object Document). This document is transferred to the Infor Business Vault using ION Connect. The information is stored in a raw data format and is automatically transformed to a relational schema in the Base Data Store, using a transformation process known as Shredding.

Business Vault Analytic Modeling is used for filling the OLAP database. Information to create the dimensions and cubes are published to the Load From Source database and the Base Data Store during a publication process. After that the OLAP database will find the published information in the Load From Source database and uses this information and the information in the Base Data Store to create dimensions and cubes.

The reports are reading data from the OLAP database and Base Data Store. Web services and plugins are used to display the reports and metrics in Infor Ming.le.

The chapter describes the process to install LN Analytics Program Cost Ledger. The chapter also lists the prerequisites for the installation process.

System requirements

Prerequisites for the LN analytics Program Cost Ledger installation:

- SQL Server 2012
- SQL Server 2014

Note: It is recommended to use the Simple Recovery model for the Base Data Store database.

- Infor LN
 - Infor LN 10.3 or later.
 - At a minimum, PMC solutions from January through December 2016 in generic KB article 22945150. You must also install the solution components of the BO2.1 packages.

- Infor BI
 - Infor ION BI 11.0 tools (see Infor BI installation Guide):
 - Infor BI Repository Administration 11.0.0.192
 - Infor BI Application Studio 11.0.0.293 including Web Services
 - Infor BI Dashboards 11.0.0.202
 - Infor BI OLAP Server 11.0.0.309

Note: When you install Infor BI OLAP Server on a separate server, you must install Infor BI Repository Administration on the same server. The Repository Administration version on both BI servers must be same. Ensure that both servers have the LN Analytics PCL 10.5.1 repository registration.

- ION
 - ION 11.1 including ION connect or higher.

Note: Ensure that the LNContractLineBillingDate and LNUserDefinedStructure bods are registered in ION.

- Business Vault

- ION Business Vault Base Data Store 10.4.5
- ION Business Vault Enterprise Edition 11.3.1

Note:

- In Business Vault, the database connection must point to the Base Data Store Database. Also, import the BOD mappings provided with the Base Data Store installation, to a data store definition that uses the same database connection.
- Ensure that the LNContractLineBillingDate and LNUserDefinedStructure Bods are registered in the NounMetaDrop folder.

Other prerequisites: Infor Ming.le

Note: Ensure the drill backs are registered in Infor Ming.le.

Installation overview

You can install the latest version of LN Analytics Program Cost Ledger 10.5.1 or you can upgrade an older version of the application. When you upgrade the existing environment to LN Analytics Program Cost Ledger 10.5.1, the existing version is overwritten.

Note: Infor does not support multiple installations of the application, on one server.

Backup Base Data Store

If you customize an existing PCL database objects and/or if you create new database objects during installation, these components in the Base Data Store, are deleted:

- Tables with the prefix PCL_
- Views with the prefix PCL_ and LN_
- Stored Procedures with the prefix PCL_
- Functions with the prefix LN_ and PCL_

Note: It is recommended that you take a backup of the customized database objects that can be deleted.

Installing a new version

The new version overwrites the existing version, making the existing version obsolete.

For all installations, the installer overwrites:

- The existing LN Analytics Program Cost Ledger related database objects in the Business Vault Base Data Store.

- The Online Help files.

When a new version of the application is installed, not all existing components are overwritten, as some components are installed in a new path with a version specific component names.

Note:

- Infor does not support multiple installations of the application on one server.
- It is recommended to remove the components of the existing solution that are not deleted during the installation, after the new version is installed. See Chapter 5.

Update of an existing version

When updating an existing version, the installer attempts to delete the existing components of the application and reinstall that component. In case the installer is unable to delete these objects, you are prompted to delete the objects before you can complete the installation process.

Note: If you want to use the existing User Management configuration, select the **Export User Management Data** option to export User Management data before you delete the repository database and registration. After the installation, use **Import User Management Data** to import the exported User Management data.

Installer Component

This section describes the individual components in the installer. By default, the installer installs all the components on one server. To install specific components, click the drop-down box adjacent to the component and select 'X'.

Installing Repository Database and OLAP Database

This component:

- Installs the application Repository Database titled PCL_Rep_LNA_PCL_10_5_1.
- Creates a repository registration titled LN Analytics PCL 10.5.1.
- Installs the OLAP Database titled LN Analytics PCL 10.5.1.
- Deploys SQL scripts to the Business Vault Base Data Store database. Refer to the "Backup Base Data Store" on page 10 section to identify the database objects to backup.
- Configures a Database Alias titled PROJECTANALYTICS.
- Configures a Database Alias titled BV_BDS.

Note: You must install these components on the system which hosts Infor BI OLAP Server.

To install LN Analytics Program Cost Ledger, Repository Database and OLAP Database:

- 1 Run the LN Analytics Program Cost Ledger installer Setup.exe.
- 2 On the Welcome to the Installation Wizard for Infor LN Analytics Program Cost Ledger window, click **Next**.
- 3 In the Custom Installation window, select **LN Analytics PCL, Repository Database, and OLAP Database**.
- 4 Click **Next**.
- 5 In the Database Server window, set **Server Type** to **SQL Server**, specify the name of the database server on which the Repository database must be installed and click **Next**.
- 6 Specify the name of the server, Business Vault Data Store database, user name and the password in the Database Server - Relational Alias (BV_DataStore) window.
This information is used to configure the BV_DataStore relational alias.
- 7 Click **Next**.
- 8 In the Script Execution dialog box, specify the server name, database name, user name and password of the Business Vault Data Store in which the scripts must be executed. By default, the information is copied from the previous step.
- 9 Click **Next**.
- 10 In the Repository window, specify the name of the server on which the OLAP runs and click **Next**.
- 11 In the Ready to Install the Program window, click **Install**.
The installation can take several minutes.
- 12 In the Installation Wizard Completed window, click **Finish**.

Note: The OLAP database is installed in the Database root directory of the BI OLAP server.

Copying Analytic Modeling files

This component is used to copy the Analytical Modeling zip files to the LN Analytics PCL 10.5.1\Analytic Modeling sub folder of the installation folder. The default installation folder is C:\Program Files (x86)\Infor\BI\.

The Analytic Modeling files must be installed on a machine with a browser. You must have access to the Business Vault Enterprise Edition URL.

To copy the Analytical Modeler files:

- 1 Run the LN Analytics Program Cost Ledger installer Setup.exe.
- 2 In the Welcome to the Installation Wizard for Infor LN Analytics Program Cost Ledger window, click **Next**.
- 3 In the Custom Installation window, select **Copy Analytic Modeling Files**. If required change the installation folder and click **Next**.
- 4 In the Ready to Install the Program window, click **Install**.
The Installation can take several minutes.

- 5 In the Installation Wizard Completed window, click **Finish**.

Copying Online Help files

This component is used to copy the Online Help files to the `Application Studio\WebServices\Help\PCL` sub folder of the installation folder. The default installation folder is `C:\Program Files (x86)\Infor\BI\`.

To overwrite existing online help files, select the parent folder of the Application Studio installation location as installation folder.

The online help files must be installed on the machine on which the Application Studio WebServices is installed.

To install the Online Help files:

- 1 Run the LN Analytics Program Cost Ledger installer Setup.exe.
- 2 In the Welcome to the Installation Wizard for Infor LN Analytics Program Cost Ledger window, click **Next**.
- 3 In the Custom Installation window, select **Copy Online Help Files**. If required change the installation folder and click **Next**.
- 4 In the Ready to Install the Program window, click **Install**.
The installation begins and can take several minutes.
- 5 In the Installation Wizard Completed window, click **Finish**.

Copying Dashboard files

This component is used to copy the LN Analytics PCL.dashboards file to the `LN Analytics PCL 10.5.1\Dashboards` sub folder of the installation folder. The default installation folder is `C:\Program Files (x86)\Infor\BI\`.

The dashboard files must be installed on a machine with a browser. You must have access to the BI Dashboard URL.

To install the dashboard file:

- 1 Run the LN Analytics Program Cost Ledger installer Setup.exe.
- 2 In the Welcome to the Installation Wizard for Infor LN Analytics Program Cost Ledger window, click **Next**.
- 3 In the Custom Installation window, select **Copy Dashboard Files**. If required change the installation folder and click **Next**.
- 4 In the Ready to Install the Program window, click **Install**.
The installation can take several minutes.

- 5 In the Installation Wizard Completed window, click **Finish**.

Configuring Application Studio Web

This component is used to create an Application Studio Web Service. All LN Analytics are configured to a default Application Studio Web Service, titled LN_AnalyticsWebservice. If you want to reuse an existing Application Studio Web Service, this component is not required. The Application Studio Web Service must be installed on the machine on which Application Studio Web Services is installed.

To configure the Application Studio Web:

- 1 Run the LN Analytics Program Cost Ledger installer Setup.exe.
- 2 In the Welcome to the Installation Wizard for Infor LN Analytics Program Cost Ledger window, click **Next**.
- 3 In the Custom Installation window, select **Configure Application Studio Web** and click **Next**.
- 4 In the Ready to Install the Program window, click **Install** to start the installation.
In the Application Studio WebServices Name window, the default name LN_AnalyticsWebservice for the LN Analytics is displayed. This name is part of the URL used to access the LN Analytics Program Cost Ledger reports through the Application Studio WebServices.
- 5 Click **Next**.
- 6 Select the method used to authenticate the Application Studio Web Services users.
Note: When using Ming.le, you must use IFS.
- 7 Click **Finish**.
- 8 To restart IIS, click **Yes**.
- 9 In the Configuration Progress window, click **Close**.
- 10 In the Installation Wizard Completed window, click **Finish**.

Configuring Dashboards Web and Content Connection

This component is used to create a BI dashboard and a content connection titled LN Analytics Program Cost Ledger. All LN Analytics are configured for a default Dashboard titled of LN_AnalyticsDashboard. If you want to reuse an existing Dashboard, this component is not required. The Dashboard feature must be installed on the machine on which BI Dashboards is installed.

To configure the Dashboard Web and Content connection:

- 1 Run the LN Analytics Program Cost Ledger installer Setup.exe.
- 2 In the Welcome to the Installation Wizard for Infor LN Analytics Program Cost Ledger window, click **Next**.

- 3 In the Custom Installation window, select **Configure Dashboards Web and Content Connections** and click **Next**.
- 4 In the Ready to Install the Program window, click **Install**, to start the installation.
In the Infor BI Dashboard Name window, the default Dashboard name for Infor LN Analytics Program Cost Ledger is displayed. This name is part of the URL used to access the LN Analytics Program Cost Ledger Dashboards in Infor BI Dashboards.
- 5 Click **Next**.
- 6 In the dashboard Authentication window, select the method to be used to authenticate the Dashboards users.
Note: Select the method used to authenticate the Application Studio Web Services users. When using Mingle, you must use IFS.
- 7 Click **Finish**.
- 8 In the Configuration Progress window, click **Close**.
- 9 In the Installation Wizard Completed window, click **Finish**.
Note: This feature must be installed on the machine which hosts Infor BI Application StudioWebServices.

To fill the OLAP database, you must perform these tasks:

- Creating and configuring the OLAP LoadFromSource Database.
- Configuring Analytic Modeling in Business Vault.
- Executing the Publications

Creating and Configuring the OLAP LoadFromSource Database

The LoadFromSource database is the interface between the Business Vault and the Infor BI OLAP Server. The LoadFromSource database is a SQL Server relational database. From the Business Vault perspective, this database is referred to as the 'target database', and from the OLAP Server perspective as the 'LoadFromSource database'. The Business Vault sends instructions to build dimensions, cubes, and load facts to the target database when dimensions and cubes are published. Infor BI OLAP Server reads instructions and processes jobs from the LoadFromSource database. First, you must create the LoadFromSource database and then configure the interface between the BI OLAP database and the LoadFromSource database. The interface between the Business Vault and the LoadFromSource database is configured later.

See the *BI OLAP Server Administrator Manual*.

Creating the OLAP LoadFromSource database

- 1 In SQL Server Management Studio, create a new database and specify a name, such as OLAP_LoadFromSource_PCL.
- 2 In SQL Server Management Studio, create the tables for the LoadFromSource database by executing the CreateOlapMetada.sql script in the database.

Note: The CreateOlapMetada.sql script is copied during the BI OLAP server installation and can be found in the bin64 folder of the BI OLAP server installation. The default path is: C:\Program Files\Infor\BI\OLAP

Configuring the OLAP LoadFromSource database in BI OLAP

The BI OLAP Server must be configured so that the OLAP database can connect to the LoadFromSource database. The configuration exists for setting the connection string and specifying the parameters that describe the polling behavior of the OLAP database to the LoadFromSource database.

To configure the BI OLAP Server, execute these steps:

- 1 Access BI OLAP Administration and go to **Computer Configuration > Local Computer**. When the LN Analytics PCL 10.5.1 database is not displayed, right-click on the Local computer and select **Add Database**, to add the OLAP database.
- 2 In the LN Analytics PCL 10.5.1 database section, select **Database Settings > LoadFromSourceDatabase > Connection String**.
- 3 Set the connection string.

Examples for ODBC connection strings to the LoadFromSource database:

```
Driver={SQL Server};Server=MySERVERNAME;  
Database=OLAP_LoadFromSource_PCL;Trusted_Connection=Yes;
```

```
Driver={SQL Server};Server=MySERVERNAME;  
Database=OLAP_LoadFromSource_PCL;Trusted_Connection=No;UID=MySQLUser;  
PWD=MySQLPassword;
```

- 4 Now specify the time period after which, the OLAP database connects to the LoadFromSource database to check if a job is present for the olap database. In the LN Analytics PCL 10.5.1 database, select **Scheduler Settings > Other > LoadFromSource** and set the value to **Yes**.
- 5 Select **Scheduler Settings > Other > LoadFromSource polling interval** and specify a value between **1** and **3**.
- 6 The modified settings of the OLAP database must be applied. Go to the Favorite Databases section and connect to the LN Analytics PCL 10.5.1 database. If the database does not exist in the Favorite Database section, you must register the database.
- 7 Right-click database registration and select **Apply Runtime Settings**.

Note:

- A LoadFromSource database can only be used by one OLAP database. Therefore, when you reuse a LoadFromSource database during an analytic upgrade, ensure that the LoadFromSource setting of the "old" olap database is set to False and changes are applied to runtime.
- When the connection sting in the BI OLAP database is incorrect, the logging information is displayed in the ALEAPR.txt OLAP log file.

Configuring Analytic Modeling in Business Vault

After the Creating and Configuring the OLAP LoadFromSource step is completed, you must configure the Business Vault to fill the OLAP database with data. It is assumed that users are set up with the IFS roles and a standard database connection to a filled Base Data Store is available. These are the prerequisites to configure the Business Vault.

To configure the Analytic Modeling in Business Vault, execute the following steps:

- 1 Importing and Setting up Models.
- 2 Setting up a Data Store.
- 3 Setting up an Application.
- 4 Importing Publications and Definitions.
- 5 Setting up a Target.
- 6 Configuring Publications.
- 7 Executing the Publications.

Importing and Setting up Models

You can import the models on the Standard database connection of the Base Data Store. For LN Analytics Program Cost Ledger, you must import the following two models.

- Base Data Store Model (version 10.4.3)
- LN Analytics PCL Model (version 10.5.1)

To import a model, use the Database Connections function. Database Connections is secured for users with the BVDatabaseAdmin role.

To import the models:

- 1 Select **Administration > Database Connections**.

The Database Connections page opens.

- 2 Select the standard database connection that connects to the Base Data Store (For example, BaseDataStoreConnection and click **drill-down**.

- 3 Select the **Models** tab and click **Import**.

The Import Wizard opens.

- 4 Browse and select the Infor Base Data Store 10.4.3 model.zip.

During the installation, the Analytic Modeling zip files are copied to the LN Analytics PCL 10.5\Analytic Modeling sub folder of the default installation folder ..Program Files (x86)\Infor\BI.

- 5 Follow the Import Wizard and select **Overwrite existing definitions with the imported versions**. Click **Import**.

- 6 To import the LN Analytics PCL Model, repeat step 2 to step 5, and select the LN Analytics PCL 10.5.1 BV Model.zip file.

- 7 When the models are displayed under the **Available grid in the Model** Tab, use the arrow to move the Base Data Store Model and LN Analytics PCL model to the Selected grid.
- 8 Add the models to the selected grid in the correct order. Move the Base Data Store Model to the bottom.

Note:

- When the same version of the Base Data Store model exists, you are not required to re-import the model.
- The LN Analytics PCL 10.5.1 model file overwrites the LN Analytics PCL model file of a previous version. After the import of the LN Analytics PCL 10.5.1 model the existing LN Analytics PCL analytic that is present on the system are obsolete.
- The delivered models are **Infor-Locked**. You can select and use an Infor-locked model within a database connection. You cannot edit or delete the model or the objects in the model.

Setting up a Data Store

To load the metadata for LN Analytics Program Cost Ledger BOD mappings, you must create a LN Analytics Program Cost Ledger Data Store.

- 1 Select **Analytic Modeling > Data Stores**.
- 2 Click **New**.
- 3 On the New Data Store page, specify the **Name** such as, PCL_METADATA, **Description**, and **Database Connection**. For the database connection select the database connection to the Base Data Store (For example, BaseDataStoreConnection).
- 4 Click **Save**.
- 5 Import the meta data for LN Analytics Program Cost Ledger BOD mappings into the new Data Store. Click **Import** and select the LN Analytics PCL 10.5.1 Metadata Data Store BOD Mappings.zip.
During the installation, the Analytic Modeling zip files are copied to the LN Analytics PCL 10. 5\Analytic Modeling sub folder of the default installation folder ..Program Files (x86) \Infor\BI\
- 6 Click **Save** to save the data store definition again.

Note:

- The status of the metadata data store including the imported BOD Mappings must be always set to **Inactive**. It is recommended to specify this in the Description of the data Store so that the status is not set to **Active** accidentally.
- A Metadata Data Store exists when you upgrade from an earlier version of Program Cost Ledger. It is recommended to delete the existing metadata Data Store and create a new Data Store. Ensure that no two Data Stores with BOD mappings of different Program Cost Ledger versions exist on your system. In installation guides of previous PCL versions, the metadata data store was referred to as LNAalyticsPCLDataStore.

Setting up an Application

To setup an application for LN Analytics Program Cost Ledger:

- 1 Select **Administrations > Applications**.

The Applications page opens.

- 2 Click **New** and create the new LN Analytics PCL 10.5.1 application.

Note:

- Business Vault creates during installation an application called Default which is empty. When this default application is not used, you can also rename the Default application to LN Analytics PCL 10.5.1.
- When an older version of Program Cost Ledger exists in Business Vault, the existing application can be renamed to LN Analytics PCL 10.5.1 and a new application is not required.

Importing the Publications and Definitions

Import the publications, hierarchy, dimension, and cube definitions of LN Analytics Program Cost Ledger. You can import the publications and definitions, using the Publication home page. You cannot select individual definitions in the import file.

During the import process the publications and definitions are associated with the database connection that you specify. The publications and definitions are also associated with the application that you are currently using.

To import the file that contains all publications and definitions:

- 1 Select **Analytic Modeling > Publications**.
- 2 Click **Import**. The Import Wizard opens.
- 3 Click **Browse** and select the LN Analytics PCL 10.5.1 AM Application Definitions and Publications.zip file to import.

During installation the Analytic Modeling zip files are copied to the LN Analytics PCL10.5.1\Analytic Modeling sub folder of the default installation folder ..Program Files (x86)\Infor\BI\

- 4 Follow the import wizard and select **Overwrite existing definitions with the imported versions**
- 5 Select the **Database Connection** that connects to the Base Data Store (For example, BaseDataStoreConnection).
- 6 Click **Import** to import the publications and definitions. The imported hierarchies are displayed in the Hierarchies page. Imported dimensions are displayed in the Dimensions page, and the imported cubes are displayed in the Cubes page and the publications are displayed in the Publications page. The Last Updated By and Last Updated On columns are updated. If imported definitions that overwrite existing definitions exist, a new definition version is added.

Setting up a Target

The LoadFromSource database is the interface between the Business Vault and the Infor BI OLAP Server. In the "Creating and Configuring OLAP LoadFromSource Database" section of this chapter, the OLAP database is configured to communicate with the LoadFromSource database. In this section, the Business Vault is configured to communicate with the LoadFromSource database.

First, you must create a Target Database Connection.

Note: From Business Vault perspective, the LoadFromSource database is referred to as the Target database.

Second, you must setup a publication target definition, that uses the created publication target. In the publication target definition, you must also specify the locales in which the dimensions and cubes must be published.

Setting up a target database connection

To create a target database connection:

- 1 Select **Administration > Database Connections**.
- 2 On the Database Connections page, select **New Target Database Connection** or click **drill-down** to update an existing target database connection that identifies the database in which the dimension and cube definitions and the data are published.
- 3 Specify all the required information to connect to the LoadFromSourceDatabase. Specify a name for the target database connection, such as OLAPLoadFromSource_PCL.
- 4 Click **Test Connection** to test the database connection.
- 5 Click **Save**.

While saving, you may be required to re-enter the username and password information.

Setting up a Publication Target and specifying locales

A publication target allows you to specify the database connection and locales information required to publish cubes, dimensions, and cube facts.

To create a new publication target:

- 1 Select **Analytic Modeling > Publication Targets**. The Publication Targets page opens.
- 2 Click **New**. Specify the required information such as Name, Target Database Connection and select the Locales that must be published to the OLAP database. Specify a name to the publication target, such as PCL_OLAP_Target.

Note:

- The Default and English locales are mandatory for each publication.
- Select the Target Database connection that is created in the Setting-up a target database section.

- 3 Click **Save** to save the publication target definition.

4 Click **Back** to return to the Publication Targets list.

5 Select the Publication Target and Activate.

Note: Infor recommends to minimize the number of locale as including more locales will decrease Cube Load performance.

Configuring Publications

A publication contains instructions about the dimensions and cube to be published to the BI OLAP database. A publication target allows you to specify the source of the data (Connection to the Base Data Store) and the target (Publication Target).

Two publications are imported for LN Analytics Program Cost Ledger:

- PCL_LOAD_1_ALL_DIMENSIONS: This creates all dimensions.
- PCL_LOAD_2_ALL_CUBES: This creates all cubes.

It is recommended that customers use the delivered publications to populate the cubes with relevant data. It is recommended that customers create own publications if required.

PCL_LOAD_1_ALL_DIMENSIONS

This publication loads all the dimensions to the BI OLAP database. It is technically not possible to load the dimensions and cubes in one publication as the PCL_CUBE_PREREQUISITE dimension is not part of the cube. This dimension must be executed to prepare the cube load.

During the import of a publication set the target manually.

To set the target:

- 1 Select **Analytic Modeling > Publications**.
- 2 Go to the PCL_LOAD_1_ALL_DIMENSIONS publication.
- 3 On the **Details** tab, select the target that connects to LN Analytics PCL 10.5.1 OLAP Database, for example PCL_OLAP_Target.
- 4 Click **Save**.

Note: When you create publication ensure:

- The PCL_OBS dimension must run after the PCL_ACTIVITY dimension as the PCL_OBS dimension re-uses the activity components generated during the creation of the PCL_ACTIVITY dimension.
- The PCL_CUBE_PREREQUISITE dimension must run as the last dimension.

PCL_LOAD_2_ALL_CUBES

This publication loads all the cubes to the BI OLAP database.

During the import of a publication set the target manually.

To set the target:

- 1 Select **Analytic Modeling > Publications**.
- 2 Go to PCL_LOAD_2_ALL_CUBES publications.
- 3 On the **Details** tab, select the target that connects to LN Analytics PCL 10.5.1 OLAP Database, for example PCL_OLAP_Target.
- 4 Click **Save**.

Note: The delivered publications do not skip the validations. The data validation process increases the execution time of the publications. After several successful publications you can skip the validations. To skip the validation process, on the **Details** tab select the **Skip all data validations** check box .

Executing the publications

You can execute the publications on demand or automatically based on a schedule.

To create the dimensions and cubes, execute these steps:

- 1 Execute the publication on demand.
 - a Select **Analytic Modeling > Publications**.
 - b Select the PCL_LOAD_1_ALL_DIMENSIONS publication and click **Publish**.
 - c Select the PCL_LOAD_2_ALL_CUBES publication and click **Publish**.
 - d To view the result, select **Monitoring > Publication Monitor**.
- 2 Execute the publication on a regular basis.
 - a Select **Analytic Modeling > Publications Schedules**.
 - b Create the required publication schedules and set the recurrence pattern.
 - c Click **Activate** to activate the publication.

Note: You must execute the PCL_LOAD_1_ALL_DIMENSIONS publication before the PCL_LOAD_2_ALL_CUBES publication. Create dimensions before the cubes in the BI OLAP database.

Post-installation tasks for Reports and Dashboards

4

You must complete the post installation tasks for the reports and dashboards, after the Infor LN Analytics Program Cost Ledger installation and the Business Vault Analytic Modeler post installation tasks are complete.

These tasks must be performed:

- Configuration in Application Studio.
- Configuring Repository Administration with IFS.
- Configuring Dashboard servicePlugin in Infor Ming.le.
- Configuring online help files.
- Importing LN Analytic Program Cost Ledger dashboards.

Configuration in Application Studio

In the Application Studio, connect LN Analytics PCL repository database using repository registration that is created during the installation process and looks like LN Analytics PCL <version number>. The user name to connect is Admin. The password is not required.

Do the following:

- In the Database Structure section, verify that the BV_BDS and PROJECTANALYTICS database connections are working. If required change the database and authentication settings. Make sure that you set the **Connect at log-on** option to yes. After testing right-click the database connection and select **Logon**.
- Verify the default value of the `_CurrentLanguage` variable. Select **Accessories > Global Variables**. Right-click the `_CurrentLanguage` variable and select the **Manage Values** for **Variables** option. Change the default value to English, if it is set to a different value and click **OK**.

Configuring Repository Administration with IFS

If a dashboard is configured to the IFS, the repository must also be configured to the IFS.

- 1 Select **Start > All Programs > Business Intelligence > Repository Administration** .
- 2 Right-click **Repository Administration** and select **Run as Administrator**.
- 3 Right-click **User Management** and select **Authentication Systems**.
- 4 Select the Infor Federation Services and provide the required information. You can register an IFS group or user. Assign the required roles to the selected user(s). See BI installation guide.

Configuring Dashboard Plug-in in Infor Ming.le

See BI Installation Guide.

Configuring Online help files

During the installation, the online help files are copied to the disk in the `Application Studio\WebServices\Help\PCL` sub folder of the installation folder. Verify that the online help files are copied to expected folder.

Importing Dashboards

In LN Analytics Program Cost Ledger, dashboards are delivered. However these dashboards must be imported.

To import the dashboards:

- 1 Login to Infor Ming.le.
- 2 Go to Dashboard.
Else, you must connect to your dashboard service URL as specified in the Configure Dashboards Web and Content Connections section of the Installation chapter.
- 3 In the Share icon, select **Import Dashboards**.
- 4 In the Import wizard, on the **Source** and **Target** tab, specify the Import File by selecting the `LNAnalyticsPCL.dashboards` file from the `LN Analytics PCL 10.5.1\Dashboards` sub folder of your installation folder (default `..\Program Files (x86)\Infor\BI`). Also specify the Target Folder and click **Next**.
- 5 On the **Dashboards** tab, select all dashboards and click **Next**.

6 On the **Content Connections** tab, select your existing content connection and click **Next**.

7 On the **Summary** tab, click **Finish**.

The Program Cost Ledger dashboards are displayed on the **Dashboards** tab.

Adopting Infor Business Intelligence Self Service

Infor Business Intelligence includes a Self Service report package and dashboard, which can be used on top of the LN Analytics content. For more information, refer to KB 1668242. You can find the Application Studio version that is used to develop the Self Service report package in the Self-Service_version.txt file. This file is included in the zip file that is downloaded.

Importing LN Analytics Administration Reports

LN Administrative reports can be downloaded from KB 1873184. The report package file can be imported to the repository database.

Removing Components of Older Releases

5

When you install a newer version of analytic while an older version is present, all the old components are not deleted automatically.

It is recommended to manually delete these old components:

- Repository registration: The repository registration can be deleted in Infor BI Repository Administration.
- Repository Database: The repository database can be deleted using SQL Server Management Studio or together with the repository registration using the **Delete Database** option in Infor BI Repository Administration.
- OLAP Database: The OLAP database can be removed by deleting the OLAP database folder from the Database Root Directory of the BI OLAP server. To delete the OLAP database, you must stop the OLAP database using the BI OLAP Administration.
- Analytic Modeling and Dashboard files: The Analytic Modeling and Dashboard files are copied to a version specific subfolder of the installation folder used during installation. Delete the subfolder such as LN Analytics PCL <X.Y.Z>, where X,Y,Z are numbers that match with the version number. The default installation folder is C:\Program Files (x86)\Infor\BI.

